


- Specifications:
- Eave height is 9'-4"
 - 26 gauge standing seam roof (galvalume color) 1/4" : 12", peak
 - 26 gauge walls, siliconized polyester finish (15 colors)
 - 26 gauge roll-up doors (20 colors) tension control and ball bearings
 - 42.5 # ground snow load, 90 MPH wind load (exposure c)
 - Gutters and downspouts (optional)
 - Roof is insulated with 6" insulation
 - 20 year warranty on roof and walls
 - Erected by Miller Buildings (5 yr. labor warranty)
 - Walls have 4" insulation covered with galvalume partitions

Quantity	Style	Sq Ft	Total
17	10x10 - Exterior Rollup	100 SF	1700 SF
19	10x10 - Internal Rollup	100 SF	1900 SF
15	10x20 - Exterior Rollup	200 SF	3000 SF
2	5x10 - Exterior Rollup	50 SF	100 SF
10	5x10 - Internal Rollup	50 SF	500 SF
6	5x5 - Internal Rollup	25 SF	150 SF
2	5x5 - Internal Swing	25 SF	50 SF
			7400 SF

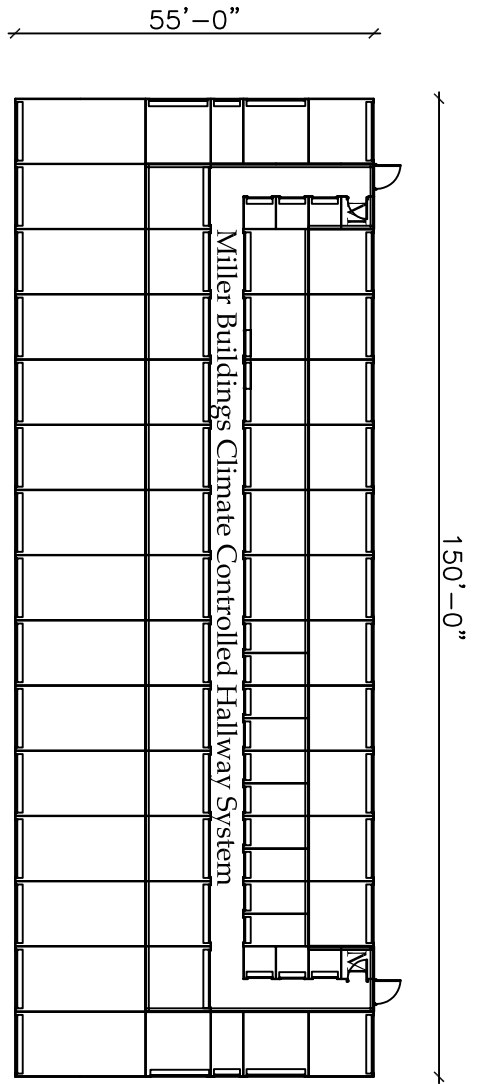

Date	2006
Drawn By	KF
Scale	1:1
Order No.	Philadelphia, PA
Sheet No.	1 of 1

Job Description	55' x 150' Mini Partially Climate Controlled 1' higher, 6" + 4" insulation
Sheet Title	Single Story Climate Controlled



MILLER BUILDING SYSTEMS

These drawings have been prepared for buildings incorporating methods & materials utilized by Miller Building Inc.

Any unauthorized use of this drawings in whole or in part is prohibited and this notice shall serve to hold harmless Miller Building Inc.,

Date	Revision	By